

YASKAWA CONTROLS CO., LTD.

MECHATROLINK- II Network Cable (Flexible Type)

Features

Made under the same strict quality control standards as standard cables, this flexible cable can be used for MECHATROLINK- II communications. It is more flexible than an optical cable and is best suited for wiring with a cable bearer.

- Durable with a fatigue strength of 10 million cycles in U-bend testing.
- Reinforced bending capability between the wire and a connector.
- Can be used with a standard cable, and communicated up to 20 m.
- All flexible cables are RoHS-compliant.



Model:


- JEPMC-W6006-05-E (with ferrite core)
- JEPMC-W6006-10-E (with ferrite core)
- JEPMC-W6006-15-E (with ferrite core)
- JEPMC-W6005-05-E (No ferrite core)
- JEPMC-W6005-10-E (No ferrite core)
- JEPMC-W6005-15-E (No ferrite core)

Specifications

Item	Specifications
Transmission Cable	Two-core shielded twisted-pair wire (Flexible type)
Cable Color	Black
Maximum Transmission Distance	20 m (when using flexible cable)
Minimum Distance between Distance	0.5 m
Terminator	130Ω

*: For more information, contact your Yaskawa Controls sales representative.

Dimensional Drawings

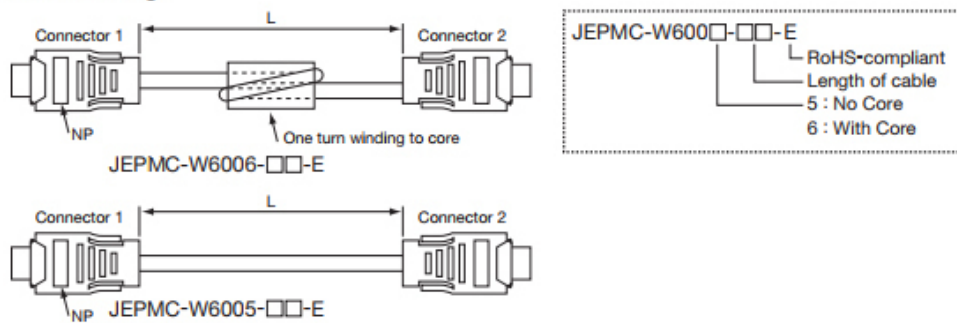

Contact Information

YASKAWA CONTROLS CO., LTD.

U.S.A.	2121 Norman Drive South Waukegan IL 60085, USA	TEL : +1-847-887-7206	FAX : +1-847-887-7030
Representative Office Europe	Hauptstraße 185, 65760 Eschborn, Germany	TEL : +49-6196/569-322	FAX : +49-6196/569-398
Overseas Sales Div.	c/o Yaskawa Electric Corporation Yukuhashi Division 2-13-1 Nishimiyaichi, Yukuhashi, Fukuoka, 824-8511 Japan	TEL : +81-930-24-8630	FAX : +81-930-24-8637
URL : http://www.yaskawa-control.co.jp/			