

昆山富通電子有限公司 (中国) MECHATROLINK-III Communication Cable

Features


- MLCC-3 is High quality, High-speed communication of MECHATROLINK-III system is realized.
- Slim type (Conductor Size AWG26 / Outside Diameter 5.2mm)
- Communications Features TIA/EIA 568B Cat5e Compliance
- Safety Standard UL20379
- The PVC jacket excellent in heat resistance and oil resistance
- RoHS Compliance



Product Specification

Item	Specification
Conductor Size	26AWG
The number of cores	2P (4c)
Shield	Braid Shield
Color of Cable	Blue (Lusterless)
Outside diameter of Cable	5.2mm
Maximum Transmission Distance	100m
Minimum Distance Between Stations	0.2m
Terminal Connector	Industrial Mini I/O Connectors

Part number	Length (L)
MLCC-3-002	0.2m
MLCC-3-005	0.5m
MLCC-3-010	1m
MLCC-3-020	2m
MLCC-3-030	3m
MLCC-3-040	4m
MLCC-3-050	5m
MLCC-3-100	10m
MLCC-3-200	20m
MLCC-3-300	30m
MLCC-3-500	50m

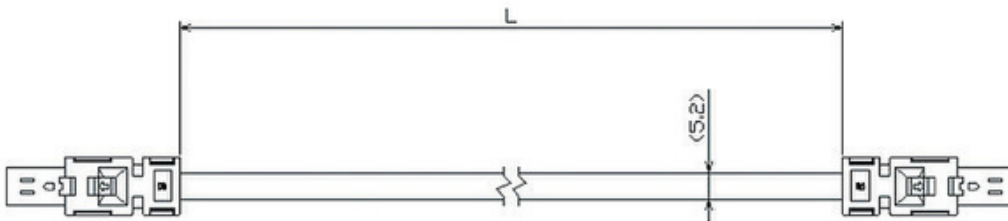

Contact Information

昆山富通電子有限公司 (中国)
江蘇省昆山市花橋鎮利勝路77号 (中国)
E-mail : taneike@fujix-net.co.jp
URL : <http://web.fujix-net.com/>

TEL : +86-512-57696297

FAX : +86-512-57696296