安川控制株式会社

MECHATROLINK-III Network Cables

Features

High-quality cables can be used to connect segments in a MECHATROLINK-III network to transfer information and signals. A variety of segments, such as host controllers, servo drives, stepping motor drives, inverters, I/O signals, and sensors are available for MECHATROLINK-III networks.

- Strict quality management, from material inspection to production.
- RoHS-compliant.

Model: JEPMC-W6012-□□-E
JEPMC-W6013-□□-E
JEPMC-W601□-□□-E

Specifications

Item	Specifications
Transmission Cable	Four a-core shielded twisted-pair wire Category-5 E
Cable Color	Blue
Maximum Transmission Distance	100m
Minimum Distance between Stations	0.2m
Connector	IMI connectors use

Note: For more information, contact our international business dept.

Dimensional Drawings

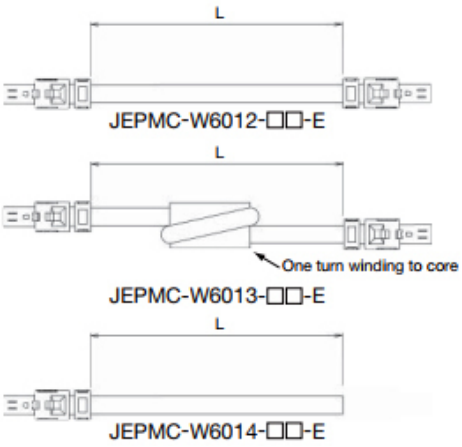

JEPMC-W601□-□□-E
- RoHS-compliant
- Length of cable
- 2 : No Core
- 3 : With Core
- 4 : No core and one side no connector

We provide various kinds of cables attached RJ-45 connector for MECHATROLINK-III networks. For more information, contact our international business dept.

Contact Information

安川控制株式会社

营业（九州）	福冈县行桥市西宫市2丁目13番1号 （株）安川电机行桥事务所内	TEL : +81-903-24-8630	FAX : +81-930-24-8637
营业（西部）	大阪府大阪市淀川区西中岛6丁目1番1号　新大阪Prime tower13楼	TEL : +81-6-6337-8102	FAX : +81-6-6337-4513
营业（东部）	东京都千代田区饭田桥1丁目3番2号曙杉馆大厦6层	TEL : +81-3-3263-5611	FAX : +81-3-3263-5625

URL : http://yaskawa-control.co.jp/